



why! W253EU replace 15.6 "screen

15.6 "HD screen replaced by an identical.

Written By: Felice Suglia






TOOLS:

- [Cross slot PH00 screwdriver](#) (1)
-

Step 1 — battery pack

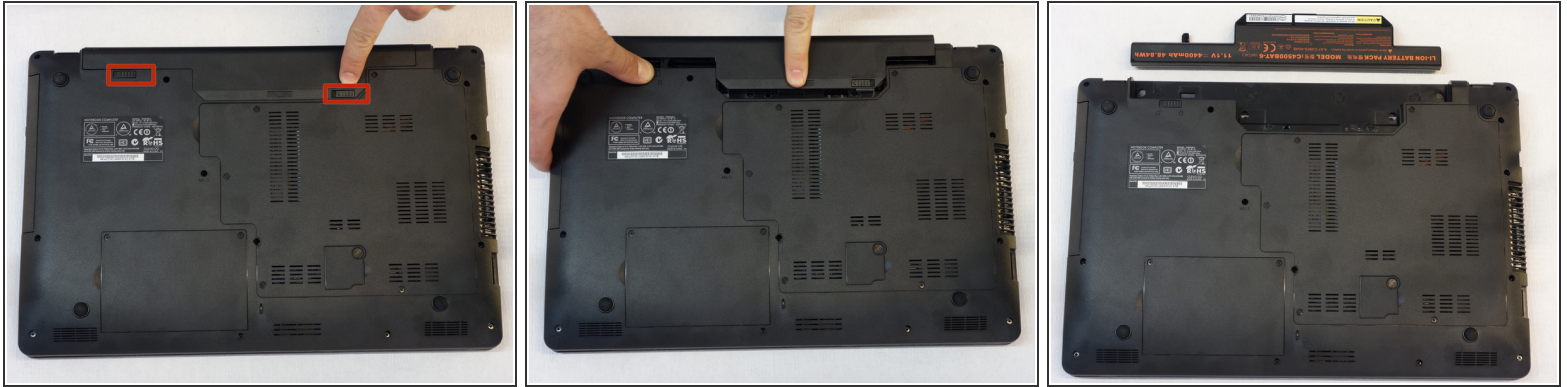

- off computer.
- Before each handle, it is important to start the expansion of the accumulator.
- bring in unlocked position slider Removing the battery.

Step 2 — 15.6 "screen




- Remove the 4 Schutzabdeckungen at the four corners of the screen with a needle or the tip of a cutter knife.

Step 3



- After the 4 screws have been removed, unclip frame of the screen.
- remove to expose frames of the screen to the screws underneath.
- which remove fasten the back cover with the Phillips screwdriver to remove the screws 8.

Step 4

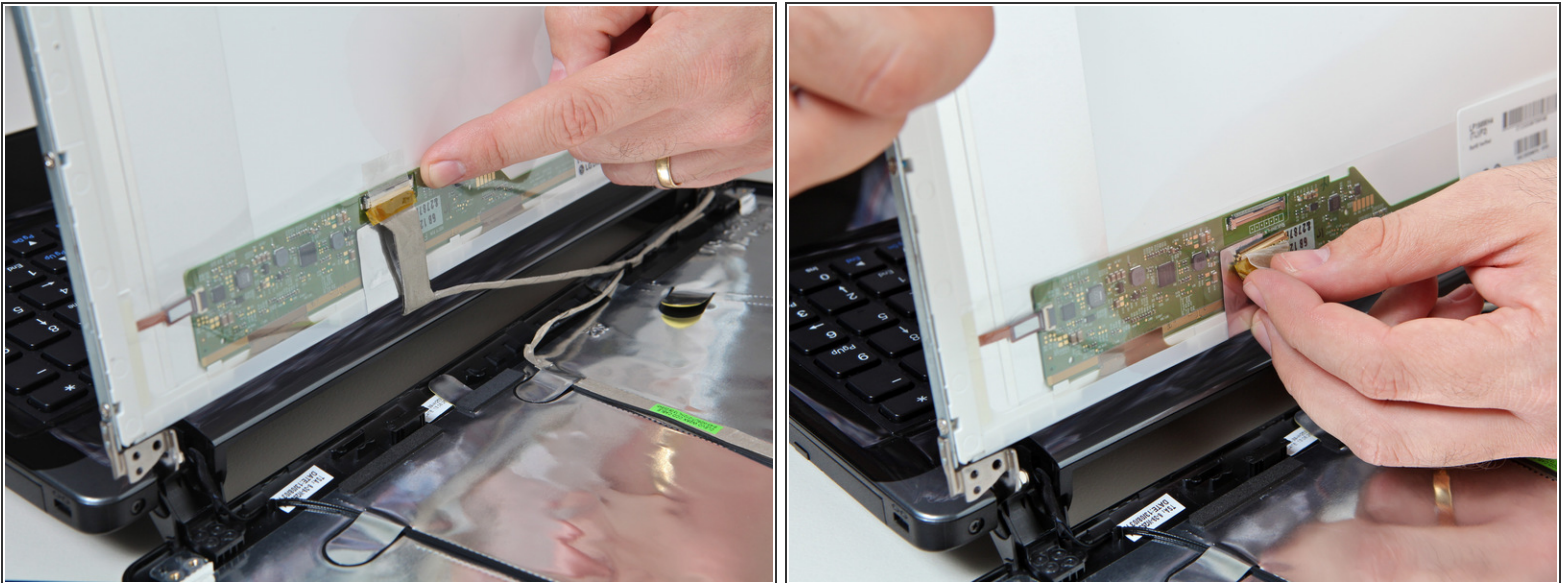

- Exposing the rear cover of the screen.
- locate the Flack plug the screen
- The tabs removed after the locking of the plug was opened slightly.

Step 5



- With the Philips screwdriver, then loosen the 8 screws fasten the screen on both sides to the chassis.
- You can now remove the screen.

Um die Maschine wieder zusammen zu bauen, oben aufgeführte Instruktionen in umgekehrter Reihenfolge ausführen.

This document was last generated on 2017-08-06 07:28:42 AM.